


IN-DASH INSTALLATION KIT FOR 2007-UP HYUNDAI ELANTRA

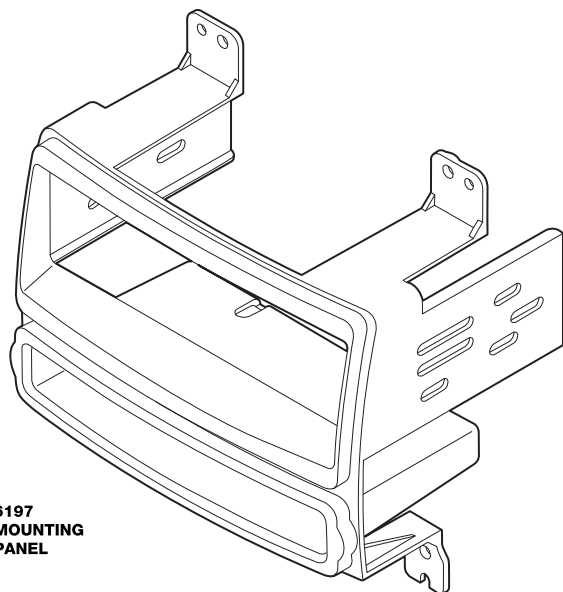

**6197
MOUNTING
PANEL**

INTRODUCTION/PRELIMINARY

This premium installation kit is for 2007-up Hyundai Elantra vehicles. Included are all the parts you need to mount your car stereo or CD player into your vehicle's dash. Refer to the individual instruction in this manual to remove your vehicle's factory radio and assemble the kit.

CAUTION
DISCONNECT YOUR VEHICLE'S NEGATIVE BATTERY TERMINAL BEFORE THE INSTALLATION TO HELP PREVENT ELECTRICAL DAMAGE. WE RECOMMEND THE USE OF A VOLT/OHM METER OVER A TEST LIGHT TO CHECK WIRING. A TEST LIGHT OR GROUNDED WIRE PROBE CAN CAUSE DAMAGE TO THE VEHICLE'S COMPUTER AND/OR DIAGNOSTIC SYSTEMS. AVOID ALL FACTORY AIRBAG WIRING - AIRBAGS CAN ACCIDENTALLY DEPLOY CAUSING SERIOUS INJURY OR DEATH.

NOTES

- See your vehicle's instructions for any special tools your installation might require.
- Read all instructions accompanying your car stereo for proper wiring and mounting instructions.

LIABILITY DISCLAIMER

This instruction booklet is based on carefully documented data and research of automobile dash disassembly, wire harness/codes and information pertaining to installation of this kit (HY1614B) in 2007-up Hyundai Elantra vehicles. Scosche Industries, Inc. cannot be held responsible for discrepancies/inconsistencies that may occur due to the automobile manufacturing changes or options, or damage that may occur in the automobile during the installation of components while using this booklet.

If you have any further questions, call our toll free technical help line at: **1-800-621-3695x3**


FACTORY WIRING CODES

For Factory Wiring Codes go to: **www.scosche-cars.com**

CAR STEREO CONNECTORS

PROVIDE EASY CONNECTION OF YOUR CAR STEREO TO FACTORY WIRING HARNESS.

HY07
2006-UP Hyundai



FACTORY STEREO REMOVAL


2007-UP HYUNDAI ELANTRA

1. Using a panel removal tool (PRT), remove the dash panel surrounding the stereo.
2. Extract (4) Phillips head screws securing the stereo to dash. Disconnect and remove.

MOUNTING THE STEREO

ISO MOUNT

1. Align aftermarket ISO DIN stereo with the 6197 kit panel's ISO mounting location starting from the back of the mounting panel.
2. Slide aftermarket ISO DIN stereo through the 6197 panel's ISO mounting brackets..
3. Use hardware supplied with the aftermarket stereo to attach stereo to mounting brackets.

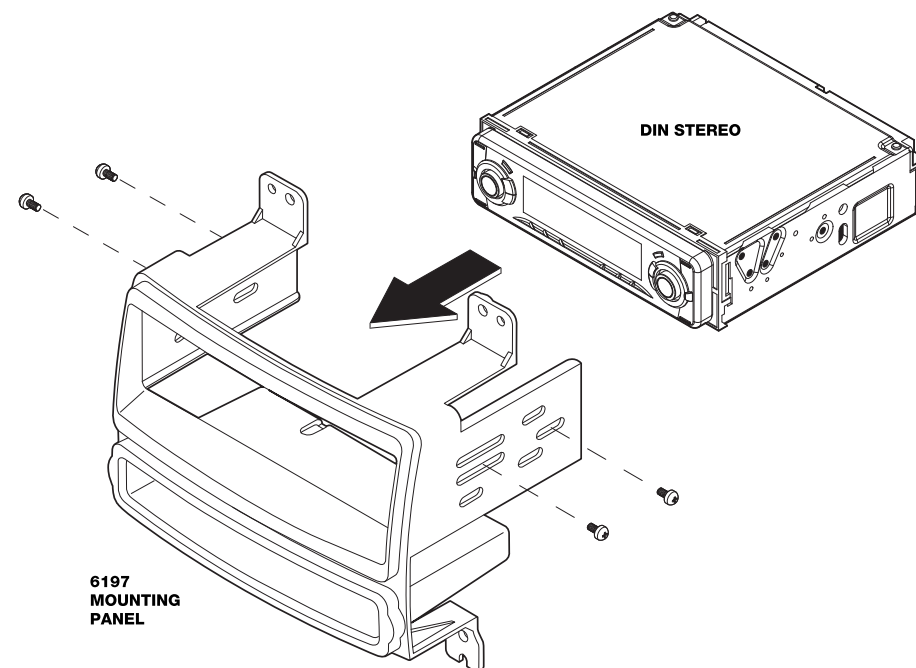

**6197
MOUNTING
PANEL**